

Aura Apus Pro LED

Low profile ceiling grid LED solution



- Energy efficient - 110 lm/W.
- No UV-radiation.
- Low weight.
- Over temperature protection
- Shallow height - suitable for low depth ceilings
- Up to 5 year warranty

Ideal for:

- Offices
- Schools
- Hospitals
- Commercial applications

Aura Apus Pro LED is a low profile ceiling grid and display LED solution. Used as lighting for standard commercial ceiling grids; typically used to replace standard 600 mm x 600 mm fluorescent luminaires.

Aura Apus Pro LED panel light is the best solution to meet your needs in your office, school and other commercial applications.



Aura Apus Pro LED panel can come with either Tridonic or Helvar Drivers.

The quality of light is high, with colour rendering of more than 80 and with an initial chromaticity tolerance of maximum 5 SDCM.

Aura Apus Pro LED | Technical specifications

Aura Apus Pro LED dimensions

Aura Apus Pro LED

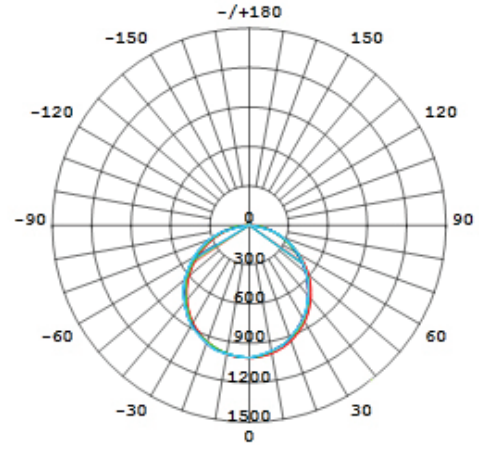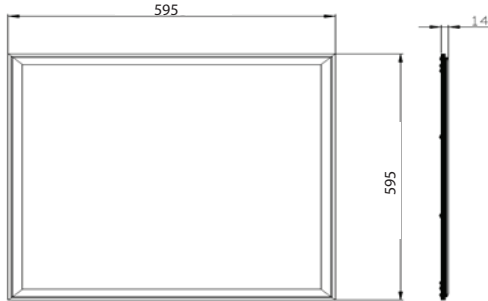

— CO/180 — C90/270
Average Beam Angle (50%) :112.5 DEG



Frame for light opening with rounded edges



Aura Apus LED surface mounting box.

PROGRAMME	ARTICLE NO.	POWER CONSUMPTION	DIMENSIONS (MM)	COLOUR TEMPERATURE (K)	SYSTEM LUMINOUS FLUX	
	Aura Apus Pro LED					
	800114	29W	595 X 595 X 14	Day Light, 6000 K	3311 lm	
	800113	29 W	595 X 595 X 14	Cool White, 4500 K	3311 lm	
	800112	29W	595 X 595 X 14	Warm White, 3000 K	3311 lm	
	800111	36W	595 X 595 X 14	Day Light, 6000 K	4091 lm	
	800110	36W	595 X 595 X 14	Cool White, 4500 K	4091 lm	
	800109	45W	595 X 595 X 14	Day Light, 6000 K	4910 lm	
800108	45W	595 X 595 X 14	Cool White, 4500 K	4910 lm		

PROGRAMME	ARTICLE NO.	TYPE	DIMENSIONS (mm)	
	Aura Apus/Apus Pro LED accessories			
	81300010	Surface mounted box (595 X 595)	649 X 649 X 64	
81300028	Frame for light opening with rounded edges for 595x595	595 X 595 X 1		